



Tharek, AR., & McGeehan, JP. (1988). Propagation and bit error rate measurements within buildings in the millimetre wave band about 60 GHz. In *8th European Conference on Area Communication (EUROCON 88), Stockholm* (pp. 318 - 321). Institute of Electrical and Electronics Engineers (IEEE).
<https://doi.org/10.1109/EURCON.1988.11166>

Peer reviewed version

Link to published version (if available):
[10.1109/EURCON.1988.11166](https://doi.org/10.1109/EURCON.1988.11166)

[Link to publication record in Explore Bristol Research](#)
PDF-document

University of Bristol - Explore Bristol Research

General rights

This document is made available in accordance with publisher policies. Please cite only the published version using the reference above. Full terms of use are available:
<http://www.bristol.ac.uk/red/research-policy/pure/user-guides/ebr-terms/>

**PROPAGATION AND BIT ERROR RATE MEASUREMENTS WITHIN BUILDINGS
IN THE MILLIMETRE WAVE BAND ABOUT 60 GHz.**

A.R. Tharek and J.P. McGeehan
Communication Research Group
Department of Electrical Engineering
University of Bristol
Bristol BS8 1TR

INTRODUCTION

Given the significant congestion in the mobile radio frequency bands below 1 GHz, there is currently significant interest in the millimetric waveband around 60 GHz for providing integrated personal communications and a wide range of digital services to mobile users and data terminals. Furthermore, with recent advances in GaAs technology, the use of 60GHz in broadband short-range point-to-point links is also the subject of much investigation at the moment. The work presented here is concerned with propagation and bit error rate measurements conducted within buildings using phase-locked oscillators at 60 GHz.

EQUIPMENT AND EXPERIMENTAL PROCEDURE.

The measurements were made with a 59.9GHz, 50mW phase-locked oscillator in the transmitter, and a 58.9GHz, 10mW phase-locked oscillator as the receiver local oscillator. Two omnidirectional 60GHz aerials were used for the measurements which had gains of approximately 7 dB, elevation beamwidths of about 20° and which were circularly polarised. These aerials were used for most of the propagation and BER measurements. For the edge diffraction measurements, a standard 20 dB gain horn aerial with a beamwidth of 18° was used for the receiver, and a high directivity horn-lens aerial was used for the transmitter. The horn-lens aerial had a gain of 37 dB, a beamwidth of 2.4° , and sidelobes whose amplitudes were more than 27 dB below the main lobe. This type of aerial was used because the measurements had to be free of any significant reflected components.

The measurements were conducted within the Queen's Building of the University of Bristol, a substantial three storey brick and reinforced concrete building. For the majority of the measurements, the transmitter and the receiver were positioned 1.5 m above the floor. For the envelope distribution measurements, the signal coverage measurements and the BER measurements in fading, the transmitter was scanned over a small area to collect the data as detailed in reference [1]. Within the scanned locations, the mean signal strength was approximately constant so that the mean or median signal power, or the envelope distribution could be accurately determined.

ENVELOPE DISTRIBUTION MEASUREMENTS

Line-of-sight (LOS) and non-LOS measurements were made with the receiver stationary and the transmitter randomly moved in a horizontal plane. Figures 1 and 2 are graphs of the received signal power against time for both these cases, which illustrate the nature of the fast fading experienced within buildings. Figure 3 shows the cumulative distribution function (CDF) of the received signal envelope for both LOS and non-LOS conditions and also the theoretical Rayleigh CDF. When there was a LOS path between the transmitter and receiver, the envelope distribution significantly departed from the Rayleigh distribution and tended to follow a Rician distribution. It is interesting to note that when there was no LOS path, the distribution was approximately Rayleigh. The LOS result was as expected, since the signal was received via many reflections off nearby objects

such as walls, furniture, ceiling and floor, and with no direct component, the envelope distribution should follow the Rayleigh distribution [2]. When a LOS path does exist, the signal so received is likely to be much stronger than the signal received via the reflected paths, so the distribution should depart from the Rayleigh distribution and become a Rician distribution [3].

When both the transmitter and receiver are stationary, the signal reaching the receiver is randomly affected by people or objects moving in the area. The results have shown that when a LOS path existed, the envelope distribution when a person was moving behind and in front of the receiver at a distance of 0.25m did not obey the Rayleigh distribution. However, when there was no LOS path the envelope distribution exhibited a near Rayleigh distribution as shown in figure 4.

MEDIAN RECEIVED SIGNAL POWER AGAINST DISTANCE DEPENDENCY MEASUREMENTS

These measurements were conducted under LOS conditions with the receiver stationary and the transmitter on a trolley pushed at a constant speed so that the time to distance conversion was linear. The received signal power was averaged over approximately 40 wavelengths. This distance was long enough to filter out most of the short term variations (fast fading), but short enough so that it did not significantly affect the variations in the median level [4]. In order to determine the propagation exponent, a straight line curve fit was performed on the median received signal power.

Different environments within buildings have different influences on the received signal power. Four areas have been examined: two types of corridor, a Laboratory, and an office. Details of these measurement areas and their influence on signal propagation are given below.

The first corridor was narrow with dimensions 18m x 1.8m x 2.7m (length x width x height) and had metal lockers along one side. The second corridor was wider with dimensions 18m x 3m x 2.5m (length x width x height) and had glass panelling on both sides. Both had 30cm thick plaster covered concrete walls and the floors were covered with varnished cork tiles. The median received signal power for the corridors decreased with distance as $1/d^{1.32}$ and $1/d^{1.20}$ respectively. The propagation laws for both corridors were therefore very similar, and the signal power fell more slowly than it would in free space. Theoretically, a $1/d^2$ law occurs in free-space, and this has been confirmed outdoors over short distances when reflections were minimised. The slow fall-off in signal power in the corridors was probably due to the smooth parallel walls, floor and ceiling which produced strong specular reflections which channelled the power to the receiver.

The laboratory was a 24m x 5.5m x 3.75m (length x width x height) room with 30cm thick plaster covered concrete walls and a floor covered with varnished cork tiles. There were many chairs and wooden benches in the room, and a large amount of electrical equipment. The median signal power decreased as $1/d^{1.71}$, which was a faster fall with distance compared to the

corridors but was still slower than it would be in free-space. Presumably, the channelling effect was still present, but to a smaller degree because the benches and equipment prevented strong specular reflections off the walls, although there could still be strong reflections off the floor and ceiling.

The office was a postgraduate work room, which was 15.5m x 3.5m x 5m (length x width x height) with plaster covered concrete walls and a carpeted floor. There were many desks, chairs and bookshelves in this room. The median signal power decreased as $1/d^{2.17}$, which was faster than the other areas tried and quite close to the $1/d^2$ free-space law. This was probably because the furniture and carpet prevented strong reflections off the walls and the floor. This was confirmed by the envelope fading which was less severe than in the two corridors and the laboratory.

SIGNAL COVERAGE MEASUREMENTS

Measurements have been conducted in an area with many offices separated by metal partitions. The transmitter was carried around the rooms and the signal was received at a fixed point in the middle of the room. The results have shown that, as expected, the 60 GHz signal is effectively screened by the metal partitions. However, when the transmitter and receiver were in the same room, a high signal power was maintained, although with severe multipath effects.

Measurements were also conducted within an area with corridors and rooms having concrete walls and wooden doors. A plan view of the area and the median received signal power at various points is shown in figure 5. The signal power when the transmitter and receiver were in different rooms was generally too small to be usable. There was, however, some leakage through the wooden doors, resulting in a high received signal power near them or when there was a LOS path through them, but it was insufficient to give adequate room to room coupling. This situation was illustrated by three median signal power measurements which were made at transmitter-receiver separation distances of about 11m. The first was a LOS measurement, the second was blocked by a 4cm thick wooden door made of oak, and the third was blocked by a 40cm thick plaster covered concrete wall. The losses relative to the LOS path were 7 dB for the path through the wooden door and 27 dB for the path through the concrete wall.

Median signal power measurements have been made with the receiver placed at ceiling height in the middle of a large room. The results have indicated that the signal power was at its lowest behind obstructions but was generally higher here compared to when the receiver was 1.5m above the floor. The signal could cover the whole room even though there was no LOS path between the transmitter and receiver at certain locations. It therefore seems that a suitable position for the radio ports is at ceiling height in the middle of the room.

RECEIVED POWER SPECTRUM MEASUREMENTS.

Measurements were also conducted to determine the spectrum of the received signal by down-converting the 1 GHz IF to an IF about 3kHz, and monitoring the spectrum on a digital spectrum analyser. This signal was centred on the analyser when there was no movement between the fixed transmitter and receiver. When the transmitter was moved away from the receiver at a constant speed of about 1 m/s, the IF shifted upwards by about 200 Hz, as shown in figure 6. Theoretically, for a mobile moving at a speed of about 1 m/s and a carrier of 60 GHz, the maximum doppler shift, f_d , is 200 Hz.

The broad peak shifted by 600Hz (+3 f_d) could have been due to the signal reflecting back to the transmitter, which then reflected it to the receiver. The broad spectrum between - f_d and + f_d can be attributed to many reflections arriving from different angles, and therefore having doppler shifts between - f_d and + f_d .

KNIFE EDGE DIFFRACTION MEASUREMENTS

Knife edge diffraction measurements were made using an aluminium sheet as the knife edge. The experimental results were found to fit the theoretical curve [5] as shown in figure 7.

The loss at a diffracted angle of 11° ($v=3$) was 22 dB above the free-space loss, which is not excessively large. In practice though, obstructions cannot be considered to be knife edges of this form, so diffraction measurements were attempted around a metal covered wall. It was found, however, that even for a small diffraction angle of 3° , the received signal was dominated by reflected signals. It is therefore likely that the diffraction around most obstructions will be small, and that reflections must be relied upon. Diffraction measurements outdoors are covered in another publication.[6]

BIT ERROR RATE (BER) MEASUREMENTS.

BER measurements were conducted for FSK modulation at 240 kbits/sec and 480 kbits/sec in both LOS and non-LOS conditions while moving the transmitter randomly in a horizontal plane in order to produce fading. The received signal envelope was recorded and analysed to obtain the mean signal power and the envelope distribution. The output noise power density was measured and the normalised SNR was calculated as the ratio of the average signal power to the noise power in a bandwidth equal to the bit rate. The SNR was varied by reducing the transmitted power with a variable attenuator. The results are shown in figure 8, where the BER varies as a function of the average, normalised SNR.

It is interesting to note that for non-LOS conditions, where the envelope was found to obey the Rayleigh distribution, the experimental curve for the probability of error was very close to the theoretical curve. Under Rayleigh fading conditions, in order to maintain an error rate of 1 in 10^5 , an increase of 18 dB in the SNR was required compared with the required SNR in the absence of fading. However, when there was a LOS path between the transmitter and receiver, an error rate of 1 in 10^5 required an increase of about 13 dB in average SNR compared to that in the absence of fading.

Fig. 8 also shows that for the conditions of the experiments conducted in our laboratory, no irreducible error rate occurred for either bit rate under LOS and non-LOS propagation. This implies that the time delay spread was much less than the bit duration of the transmitted data and also that the random FM due to doppler shifts was much smaller than the FM of the FSK signal.

DISCUSSION AND CONCLUSIONS

This paper has presented the measured data for indoor 60GHz propagation characteristics and FSK BER measurements.

Generally, the non-LOS case causes the greatest difficulties since the median received signal power is at its lowest, the fast fading is more severe (Rayleigh) compared to that for LOS conditions (Rician), and the BER is at its highest. Attaching the radio transmitter near the middle of the ceiling can be expected to

R.1.8.

improve the signal strength behind obstructions. An aerial which directs the radiation downwards and sideways would probably improve the signal strength even further.

The screening effect of concrete walls means that one radio transmitter would be required per room. The low attenuation of wooden doors suggests that if the walls are made of chipboard, the signal would perhaps cover several rooms.

Doppler spreading is small indoors compared to the transmitted signal bandwidth of FSK, so its effects are likely to be small. This is confirmed by lack of an irreducible error rate with the BER measurements. The results have also indicated that a relatively low attenuation of signal strength occurs with knife edge diffraction. However, practically occurring diffractors (obstacles) do not have knife edges, and the received signal power due to diffraction is generally small compared to that due to reflections.

Since no irreducible error rate occurred in the BER measurements at 480 kbits/sec, it is possible that a higher bit rate could be used without problems of intersymbol interference caused by time delay spread. However, in other areas, the time delay spread may be higher, so a lower bit rate would have to be used.

Acknowledgement

One of the authors (A.R. Tharek) would like to thank the University of Technology Malaysia and the Malaysian Government for their financial support.

REFERENCES

1. Cox, D.C., Murray, R.R., and Norris, A.W. "800 MHz measurements in and around suburban houses," Bell Labs. Tech. J. pp 921-950, July-Aug, 1958
2. Clarke, R.H. "A statistical theory of mobile radio reception" Bell Sys. Tech. J. Vol 47, pp 957-1000, July 1968.
3. Rice, C.O., "Statistical properties of a sinewave plus random noise", Bell Sys. Tech J., Vol 27 pp 109-157, Jan. 1948.
4. Lee, W.C., "Estimate of local average power of mobile radio signal" IEEE Trans. on Vehicular Technology, Vol. VT-34, No. 1, February 1985.
5. Rokkos, N. Johnson, R. A. "Diffraction of millimeter wave communication signals into shadow region" CORADCOM-81-1, U.S. Army Communication Research and Development Command, Fort Monmouth, NJ 07703 (1981)
6. Tharek, A.R., Kalso, A. and McGeehan, J.P., "Initial propagation measurements for 60GHz microcellular mobile radio systems" Forth International Conference on Radio Receivers and Associated Systems, Bangor, July 1986.

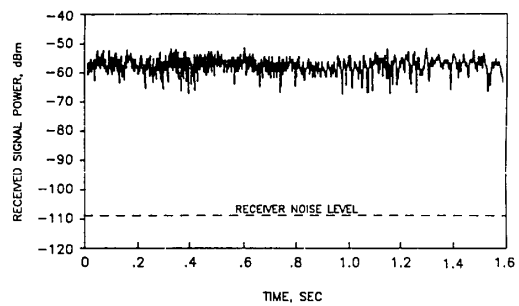


FIG. 1 RECEIVED SIGNAL POWER WHEN THERE WAS A LOS PATH BETWEEN TRANSMITTER AND RECEIVER FOR RANDOM SCANNING OF THE TRANSMITTER AT ABOUT 0.8m/sec

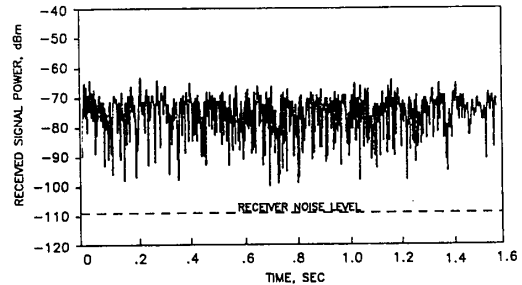


FIG. 2 RECEIVED SIGNAL POWER WHEN THERE WAS NO LOS PATH BETWEEN TRANSMITTER AND RECEIVER FOR RANDOM SCANNING OF THE TRANSMITTER AT ABOUT 0.8m/sec.

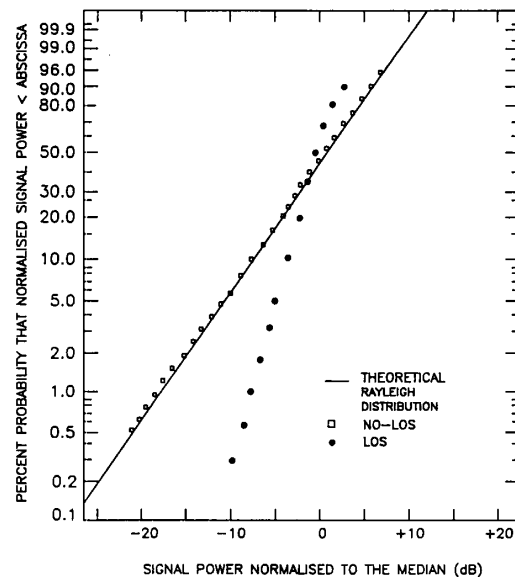


FIG. 3 CDF OF THE RECEIVED SIGNAL POWER FOR LOS AND NON-LOS CONDITIONS WITH THE TRANSMITTER MOVING.

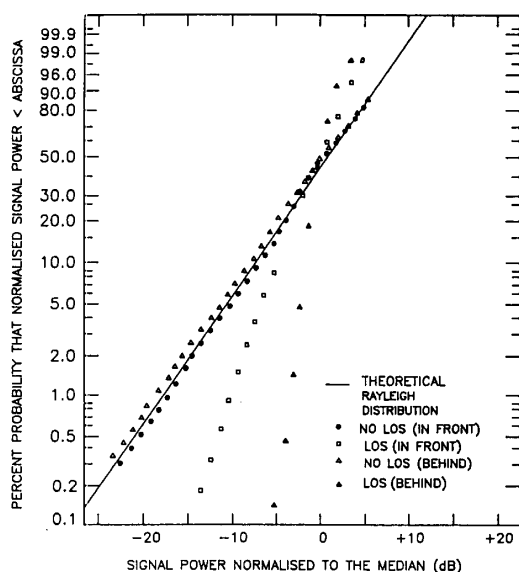


FIG. 4 CDF OF THE RECEIVED SIGNAL POWER FOR LOS AND NON-LOS CONDITIONS WITH A PERSON MOVING IN FRONT OF AND BEHIND THE RECEIVER

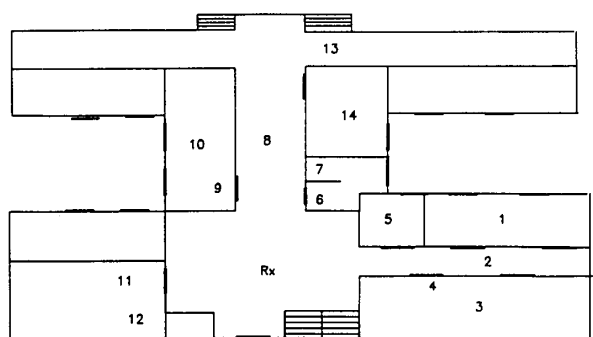


FIG. 5 PLAN VIEW OF AN AREA WITH CORRIDORS AND ROOMS AT GROUND FLOOR OF THE BUILDING AND THE MEDIAN RECEIVED SIGNAL POWER AT VARIOUS LOCATIONS.

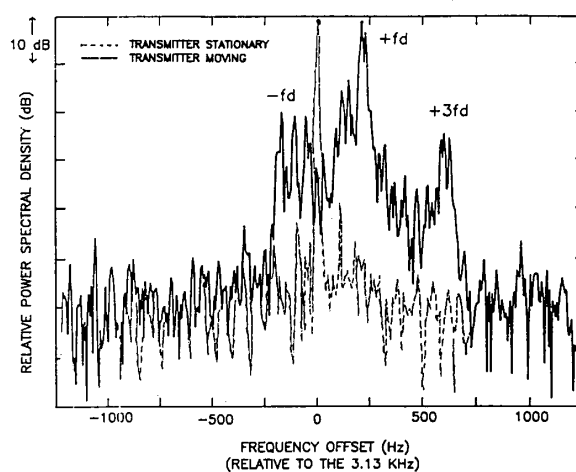


FIG. 6 POWER SPECTRUM OF RECEIVED SIGNAL

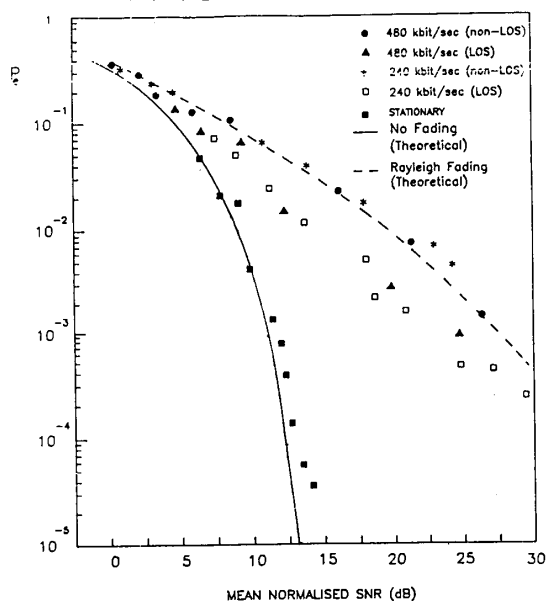


FIG. 8 BER IN FADING AND NON-FADING CONDITIONS FOR NON-COHERENT FSK.


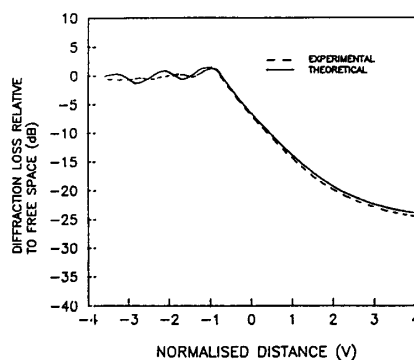


FIG. 7 KNIFE EDGE DIFFRACTION LOSS MEASUREMENTS.